



GROVE
worldwide



RT6000B Series

Rough-Terrain Hydraulic Crane Specifications

Superstructure specifications

Boom	32 ft. to 80 ft. (9.8m - 24.4m) three section Trapezoidal† full power boom. Telescoping is mechanically synchronized with single lever control. Telescopic sections slide on adjustable and replaceable wear pads. Maximum Tip Height: 88 ft. (26.8m).
Swingaway Extension	30 ft. (9.3m) lattice swingaway boom extension stows alongside base boom section when not in use, offsettable at 0°, 15° or 30°. Maximum Tip Height - 117 ft. (35.6m).
Optional Telescopic Swingaway	30 ft. to 42 ft. or 54 ft. (9.3 to 12.8m or 16.4m) telescopic lattice Swingaway extension with offset links, offsettable at 0°, 15°, or 30°. Stows alongside base boom when not in use. Maximum Tip Height - 140 ft. (42.7m).
Boom Nose	Four sheaves mounted on heavy duty tapered roller bearings with removable pin-type rope guards. *Optional removable auxiliary boom nose with removable pin type rope guard.
Boom Elevation	Two double acting hydraulic cylinders with integral holding valve provides elevation from -2.5° to 75°.
Load Moment & Anti-Two Block System	Standard load moment and anti-two block system with audio-visual warning and control lever lockout. These systems provide electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block conditions.
Cab	Full vision, all steel fabricated with accoustical lining and tinted safety glass throughout. Deluxe seat incorporates armrest mounted hydraulic joystick controls. Dash panel incorporates gauges for all engine functions. Other standard features include: telescoping tilt steering wheel, sliding side and rear windows, electric windshield wash-wipe, circulating air fan, manual skylight wiper, swing horn, fire extinguisher, seat belt and ashtray.
Swing	Ball bearing swing circle with 360° continuous rotation. Grove planetary glide-swing with foot applied multi-disc brake. Spring applied hydraulically released parking brake and plunger type, 2 position, mechanical house lock operated from cab. Maximum speed: 3.3 RPM.
Counterweight	Removeable, bolted to turntable mast.

HYDRAULIC SYSTEM

Pumps	3 main gear pumps, combined capacity 112.5 G.P.M. (426 LPM) driven by carrier engine through P.T.O. *Optional pump disconnect with engine jogging switch.
Valves	Precision four way double acting pilot operated control valves, 3 individual valve banks permit simultaneous control of multiple crane functions.
Filter	Return line type, full flow with bypass protection and service indicator. Replaceable cartridge with micron filtration rating of 7/17/22.
Reservoir	88 gallon (333 L) with spin-on breather filter, external sight gauge, clean out access, strap mounted to frame.
Oil Cooler	Remote mounted with thermostatically controlled electric motor driven fan.
Pressure Check Panel	System pressure test panel permits easy verification of circuit pressures.

HOIST SPECIFICATIONS

Power up and down equal speed, planetary reduction with automatic spring applied multi-disc brake and hoist drum cable follower.

Make/Model		Main hoist Grove H015D-20	*Auxiliary hoist Grove H015D-20
Maximum single line speed	Bottom layer	274 FPM (84m/min)	147 FPM (45m/min)
	Intermediate layer	323 FPM (98m/min)	174 FPM (53m/min)
	Top layer	348 FPM (106m/min)	187 FPM (57m/min)
Maximum single line pull	Bottom layer	10,020 lbs. (4545 kg)	10,020 lbs. (4545 kg)
	Intermediate layer	8,485 lbs. (3849 kg)	8,485 lbs. (3849 kg)
	Top layer	7,879 lbs. (3574 kg)	7,879 lbs. (3574 kg)
Maximum permissible single line pull w/5:1 Strength Factor		9,080 lbs. (4119 kg)	9,080 lbs. (4119 kg)
Maximum rope stowage		451 ft. (137m) 5/8 in. (16mm)	451 ft. (137m) 5/8 in. (16mm)
		Note: 450 ft. (137.2m) length of wire rope supplied with basic standard unit.	
Hoist options		Electronic hoist drum rotation indicators.	

†Patented Grove feature or patent pending.

*Denotes optional equipment.

Carrier specifications

Frame	High strength alloy steel all welded box-type construction with integral outrigger housings and front/rear lifting, towing and tie down lugs.
Outrigger System	Hydraulic single stage double box telescopic beam and 'inverted' jack outriggers with integral holding valves. All steel fabricated quick release type outrigger floats. 16 1/2" (429mm) square.
Outrigger Controls	Located in cab on front dash panel requires two hand operation. Crane level indicator located in cab.
Engine	Cummins 6BT 5.9L six cylinder turbo-charged water cooled diesel - 5.9 liters, 125 bhp (93 kw) (Gross) at 2,800 RPM. Maximum torque 325 ft. lbs. (45 kg/m) @ 1,700 RPM.
Optional Engine	Deutz F6L912 six cylinder naturally aspirated air cooled diesel - 5.7 liters, 121 bhp (90 kw) (Gross) @ 2,650 RPM. Maximum torque 265 ft. lbs. (37 kg/m) @ 1,500 RPM.
Fuel Tank Capacity	60 gallons (227 liters)
Electrical System	Two 12 volt - maintenance free batteries, 625 CCA @ 0°F. 24 volt starting.
Drive	4 x 4.
Steering	Fully independent power steering: Front: Full hydraulic controlled by steering wheel. Rear: Full hydraulic hand lever controlled. Provides infinite variations of 4 main steering modes - front only, rear only, crab and coordinated. *Optional rear wheel steer indicator.
Transmission	Remote mounted powershift with 6 speeds forward and 6 reverse, 3 in high range, 3 in low range. Rear axle disconnect for 4 x 2 travel.
Axes	Front: Drive-steer with differential and planetary reduction hubs, rigid mounted to the chassis. Rear: Drive-steer with differential and planetary reduction hubs, pivot mounted at center of chassis frame, providing up to 12" of oscillation (305mm). Optional: *No-spin differential on rear axle.
Oscillation Lockouts	Automatic full hydraulic lockouts on rear axle permits oscillation only with boom centered over the front. *Optional oscillation lockout override control.

Tires	Std. 20.5 x 25 - 24 P.R. Earthmover type, tubeless; or *16.00 x 25 - 28 P.R. Earthmover type, tubeless.
Brakes	Dual braking system, air over hydraulic operating on all wheels. Spring-applied, air released front axle mounted parking brake.
Lights	Full lighting package including turn indicators, head, tail, brake and hazard warning lights.
Maximum Speed	21.8 MPH (35 kph)
Maximum Gradeability	98.8% Theoretical based on 54,070 lb. (24,526 kg) GVW, 20.5 x 25 tires, pumps disengaged, 80 ft. (24.4m) boom plus 30 ft. (9.3m) swingaway.
Gross Vehicle Weight & Axle Loads	BASIC STANDARD MACHINE Front 26,785 lbs. (12,150 kgs) Rear 26,885 lbs. (12,195 kgs) G.V.W. 53,670 lbs. (24,345 kgs)
Miscellaneous Standard Equipment	Full width steel fenders, dual rear view mirrors, hookblock tiedown sling, electronic back-up alarm, light package, front stowage well.
Optional Equipment	* Auxiliary hoist * Worklights * 360° Rotating beacon * Cab spotlight * Tachometer * Cold start aid, (less canister) * Engine block heater * Electric skylight wiper * Hookblocks * Tow winch (front mounted-maximum single line pull - 15,000 lbs. (6804 kg); maximum speed - 75 ft/min) * Spare wheel assembly * Tire inflation kit * Tool kit * Pintle hook front/rear * High Speed Glide (boom suspension system) * Opening Skylight * Diesel Heater/Propane Heater/Defroster



†Patented Grove feature or patent pending.

*Denotes optional equipment.

Dimensions

RT600B Series

TIRE SIZE	16.00 x 25	20.5 x 25
A (TRACK)	77 1/2" (1969)	81 1/8" (2061)
B (OAW)	96" (2438)	105" (2667)
Turning Radius	17' (5182)	
Ground Clearance	19 1/8" (486)	

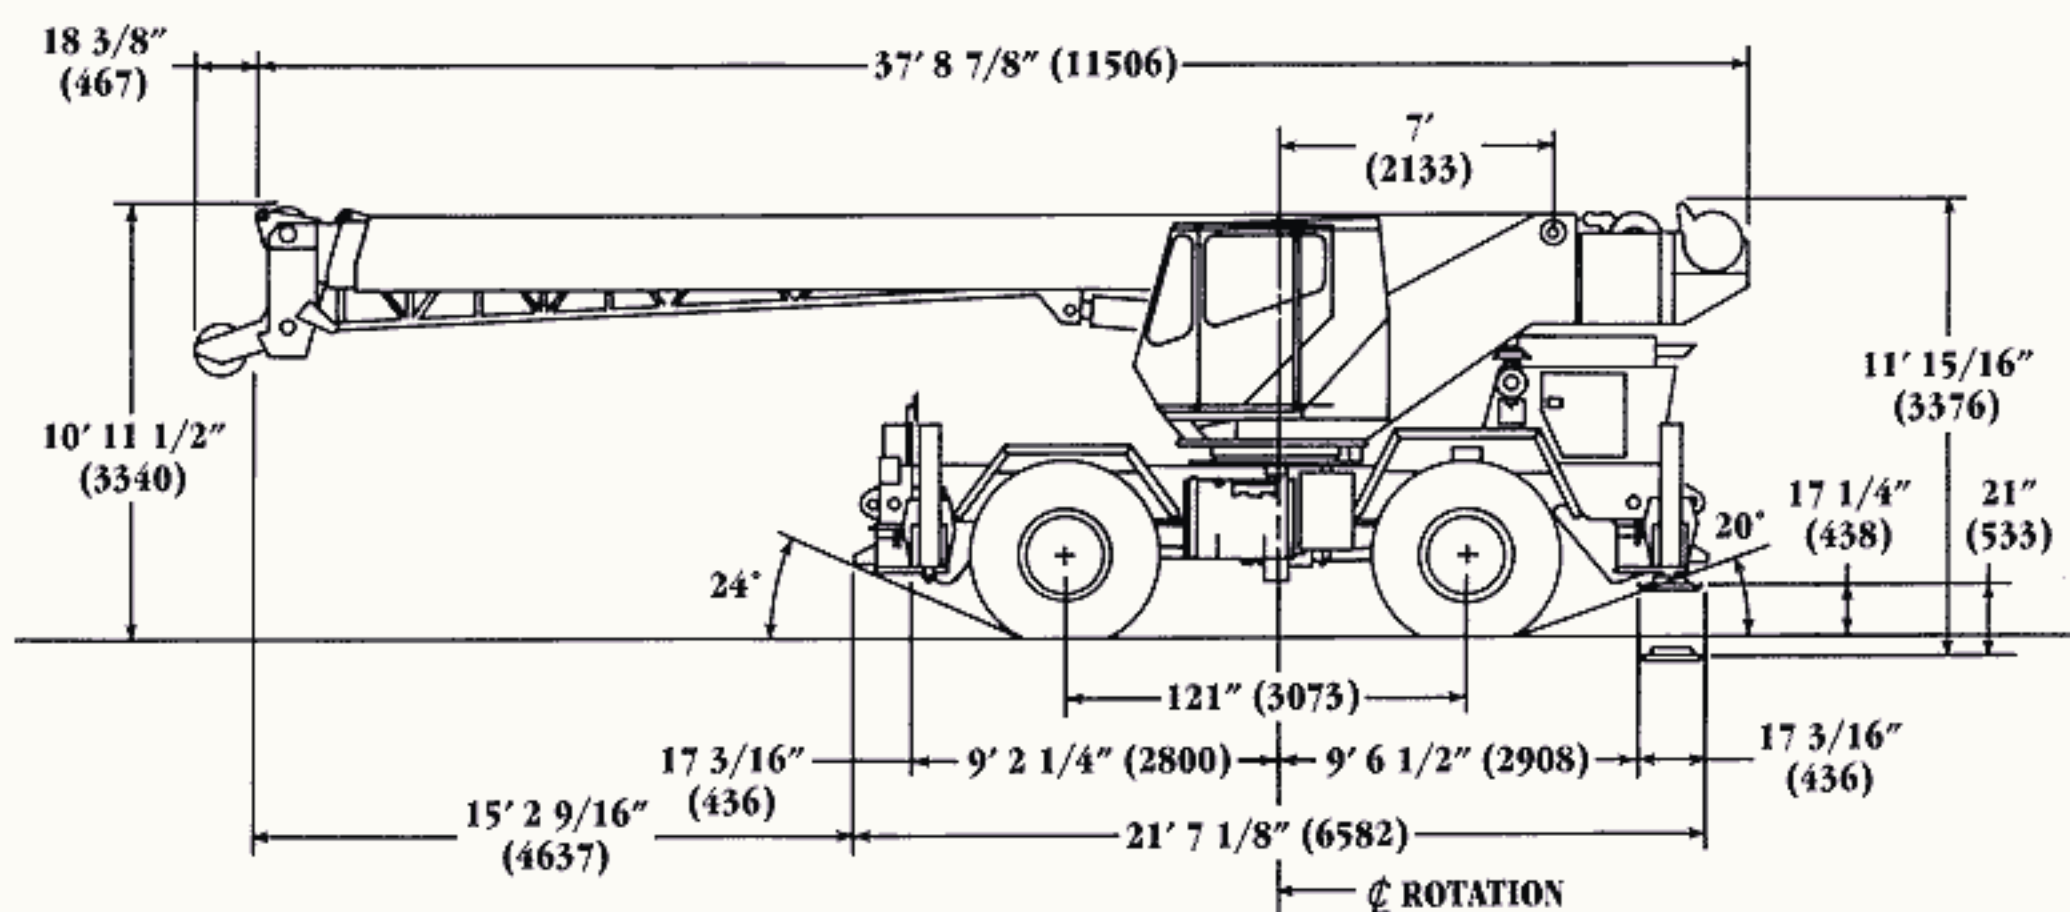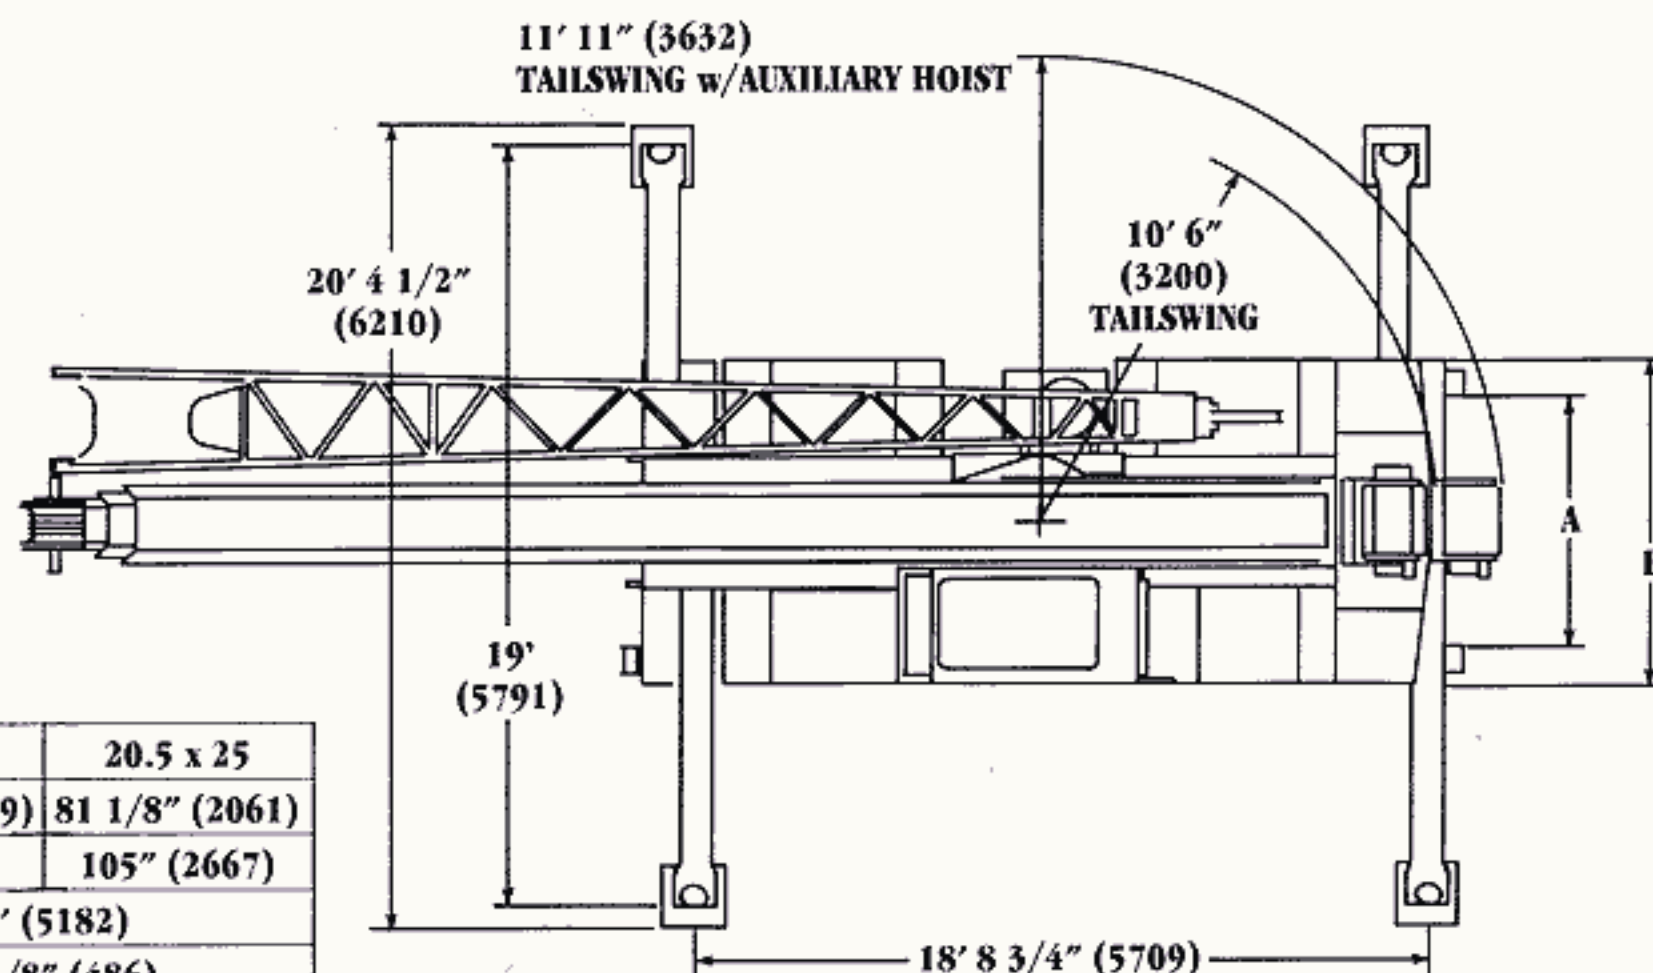

Grove Worldwide - World Headquarters
1565 Buchanan Trail East
Shady Grove, Pennsylvania 17256
Phone: (717) 597-8121 Telex: 1842308 Fax: (717) 597-4062

Grove North America
P.O. Box 21, Shady Grove, Pennsylvania 17256
Western Hemisphere, Asia/Pacific
Phone: (717) 597-8121 Telex: 1842308 Fax: (717) 597-4062

Grove Europe*
Sunderland, England SR4 6TT
Europe, Africa, Middle East, Near East
Phone: (091) 565-6281 Telex: 53484 CRANES G Fax: (091) 564-0442

* Grove Coles Limited, Registered in England, Number 1845128, Registered office, Crown Works, Pallion, Sunderland, Tyne & Wear, England SR4 6TT.

Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.

Distributed By: