



MICRO 6/3M


Single Phase - 2 poles - 3000 RPM - 50 Hz
230 Volt



Mechanical Features		Electric Features	
General		General	
Working Moment	0.12 kgcm	Nominal Voltage	🌱 : 230
Unbalance	0.06 kgcm	Input Power	0.02 kW
FC	6 kg	Current A Max	🌱 : 0.15 A
Bearings		Power factor	0.64
TYPE (SKF)	627 ZZ	Ia/In	0
Life(h)	100% >100000	Certification	
	80%:	ATEX II 3D Ex tD A22 IP66	T 100°
	50%:	Max Amb Temp.	40 °C
Bearing Grease (SKF LGHP2)			
Lube Schedule (g)			
Lube Replacement (g)			

Dimensional Features (mm)

Fig. L

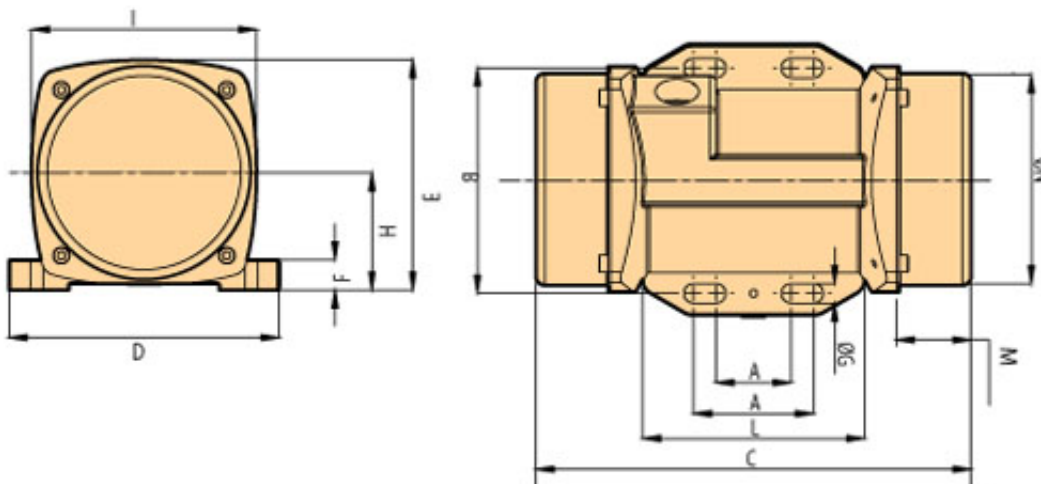

A	25-40
B	75
G	6.5
C	145
M	25
holes	4
D	90
E	76
F	10
H	39
I	75
L	74
N	70

Clamping Torque(Nm)

5.4

[Drawings Download]

Weight(kg)	Screw	Washer	Cable Type	Cable Glande
1.6	M5	5.3x10	3Gx1.5	M16